



"Power Quality is Our Business"

**Code (240): IN-1011050**  
**Code (300): IN-1011060**

5500 E. Loop 820 #205  
 Ft. Worth, TX 76119  
 Phone: 817.483.8497  
 Fax: 817.572.2242  
 www.sinetamer.com  
 www.intransltda.com

The SineTamer® RM series of units blends outstanding high-energy "impulse" suppression with excellent "ring-wave" transient protection with our Frequency Attenuation Network®. This durable device is intended for general purpose and sensitive/critical load applications. The RM-STxx is typically installed at small to medium service entrances, distribution and sub-distribution panels. Please discuss specific installations with your local representative. Compact size and non-metallic enclosure design also allow it to be installed directly inside electrical panels and individual equipment disconnects. The internal installation provides the absolute shortest possible leadlength and optimum performance.

This economical device has features that are not available in devices costing many times its price. Its compact size makes installation a breeze. **Maintenance Free** operation and **20 Year Unlimited Free Replacement Warranty** provide peace of mind.

GENERAL	
<b>Description:</b>	Parallel connected, transient voltage surge suppressor device utilizing both high-energy handling and sine-wave tracking circuitry for virtual elimination of impulse and ring wave type transients. (actively tracking the AC sine wave)
<b>Application:</b>	Designed for use at ANSI/IEEE Categories C, B and A with susceptibility up to medium exposure levels. Designed to protect sensitive/critical loads fed from distribution panels, branch panels and/or individual equipment panels.
<b>Warranty:</b>	<b>20 Years Unlimited Free Replacement</b>
<b>Product Qualifications:</b>	Listed to ANSI/UL 1449 Fourth Edition by UL. ML record: E363345; CSA file: 259700, UL1283* and CE Compliant, (* Type 2 SPDs only) ISO 9001:2008, ANSI C62.72-2007, IEC 61643-1 Class 2&3

MECHANICAL	
<b>Enclosure:</b>	High strength ABS Plastic, NEMA 1 rated enclosure.
<b>Mounting:</b>	3/4" conduit fitting (internally threaded) and external mounting feet.
<b>Connection Method:</b>	#10 stranded wire.
<b>Shipping Weight:</b>	≈6 lbs // 2.7 kg


ELECTRICAL	
<b>Circuit Design:</b>	Parallel connected, internally fused, hybrid design incorporating all mode protection, and utilizing our encapsulated design to provide improved durability. All suppression circuits are encapsulated in our exclusive compound to assure long component life and complete protection from the environment and/or vibration.
<b>Protection Modes:</b>	L-N, L-L (Normal Mode), and L-G, N-G (Common Mode). (Seven discrete modes)
<b>Input Power Frequency:</b>	50-60Hz constant
<b>EMI/RFI Noise Attenuation:</b>	30dB Max. from 1kHz to 10MHz
<b>Capacitance:</b>	3N series: L-L = 1.7 uF. L-G = 0 uF
<b>Circuit Diagnostics:</b>	Super Bright LED, 1 per phase, normally on.
<b>Temperature Rating:</b>	Up to 80°C
<b>Humidity</b>	0-99% Non-condensing
<b>Nominal Discharge Current:</b>	10kA I(n) Standard & 20kA I(n) Optional
<b>Fusing:</b>	Component Level Thermal and Board Level Current Fusing
<b>kAIC Rating:</b>	200 kAIC when installed according to installation instructions
<b>Options:</b>	-V Remove Frequency Attenuation; -N Remove N-G attenuation filter; -S6 Surge Counter; -C Dry Relay Contacts, -C1 Dry Relay Contacts with wires. AC11S6 – audible alarm with Surge Counter -X3 Nema 4 enclosure. Other options available. Call!



## AC Distribution Panel Unit



## Model RM-STxx

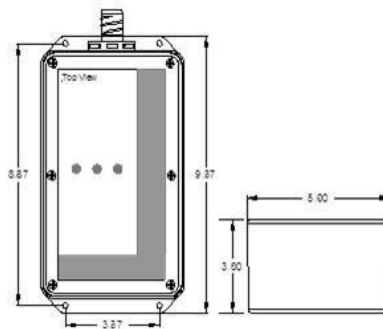

### MEASURED LIMITING VOLTAGE PERFORMANCE AND ELECTRICAL SPECIFICATIONS

Model	Circuit Type	MCOV	Peak Surge Current (Amps) Per Mode/Phase	Mode	ANSI/IEEE C62.41 & C62.45 Let-Through Voltage Test Results for both 10kA and 20kA I(n) NDC		
					A1 2kV, 67A	Cat B3/C1 (6 kV, 3 kA)	C3 20kV, 10kA
					100KHz Ring Wave 270° Phase Angle	90° Phase Angle	Impulse Wave 90° Phase Angle
RM-STxx3Y1	120/208V, 3ØY (4 wire + ground)	300 L-L 150 L-N 150 L-G 150 N-G	See Chart Below	L-L L-N L-G N-G	55 35 60 55	576 377 380 541	1200 914 1200 1200
RM -STxx3Y2	220/380V, 3ØY 277/480V, 3ØY (4 wire + ground)	550 L-L 320 L-N 320 L-G 320 N-G	See Chart Below	L-L L-N L-G N-G	130 60 80 55	805 560 588 941	1400 1050 1400 1575
RM -STxx3N2	240V, 3ØΔ (3 wire + ground)	320 L-L 320 L-G	See Chart Below	L-L L-G	90	576 497	1275 1275
RM -STxx3N4	380V, 3ØΔ 480V, 3ØΔ (3 wire + ground)	550 L-L 550 L-G	See Chart Below	L-L L-G	90	792 792	1375 1

**Let-Through Voltage Test Environment:** Positive Polarity. Time base=1ms. All voltages are peak (±10%). Surge voltages are measured from the insertion point of surge on the sine wave to the peak of the surge. All tests are Dynamic (voltage applied) except N-G which is static (no voltage applied). All tests were performed with 6 inches of lead length outside the device enclosure which simulates actual "as installed" performance.

Single-pulse, surge current capacities of 200,000 amps or less are determined by single-unit testing of all components within each mode. Present industry test equipment limitations require testing of individual components or sub-assemblies within a mode for single-pulse, surge current capacities over 200,000 amps.

Peak Surge Current per Mode/Phase for each Model. See below for xx =	
240	80,000 / 160,000
300	100,000 / 200,000